


(12) UK Patent Application (19) GB (11) 2 182 559 (13) A

(43) Application published 20 May 1987

<p>(21) Application No 8623470</p> <p>(22) Date of filing 30 Sep 1986</p> <p>(30) Priority data</p> <p>(31) 547885 (32) 2 Nov 1983 (33) US</p>	<p>(51) INT CL⁴ A61K 9/22 A61M 31/00</p> <p>(52) Domestic classification (Edition I) A5B Q</p> <p>(56) Documents cited GB A 2155787 GBA 2074860 GB A 2148712</p> <p>(58) Field of search A5B Selected US specifications from IPC sub-classes A61K A61M</p>
<p>(71) Applicant Alza Corporation, (Incorporated in USA-California), 950 Page Mill Road, Palo Alto, California 94304, United States of America</p> <p>(72) Inventors James B. Eckenhoff, Felix Theeuwes, Joseph C. Deters</p> <p>(74) Agent and/or Address for Service F. J. Cleveland & Company, 40-43 Chancery Lane, London WC2A 1JQ</p>	

(54) Dispenser for thermo-responsive drugs

(57) A dispenser (10) for delivering a beneficial agent formulation (18) to a warm, fluid environment of use comprises an outer semipermeable wall (12) surrounding and laminating an inner hydrophilic, swellable wall (15) which defines an interior space (14) for containing a thermo-responsive beneficial agent formulation. A passageway (13) through the semipermeable wall connects the exterior of the dispenser through an opening in the inside wall with the interior of the dispenser. The drug composition contained in the dispenser preferably melts at body-temperature. The inside wall (15) may be formed of a hydrogel polymer eg. poly-(hydroxyalkyl methacrylate). The outer wall (12) may be a cellulosic polymer such as an ester or ester-ether.

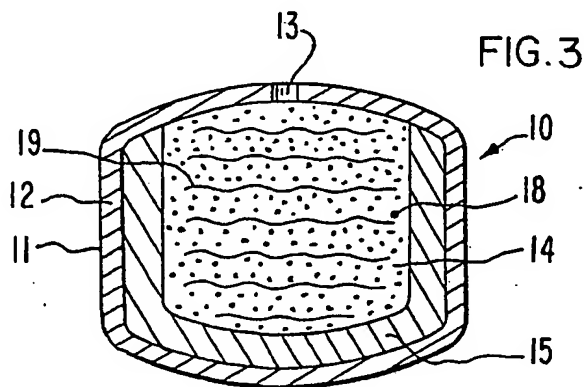

GB 2 182 559 A

FIG. 1

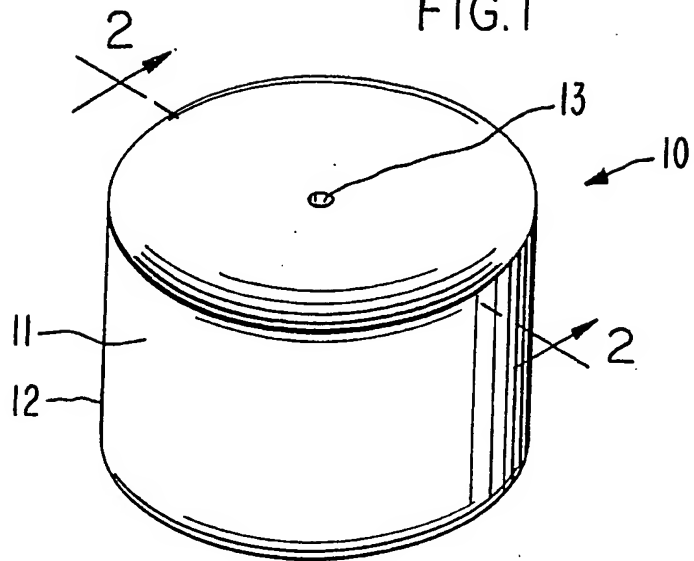


FIG. 2

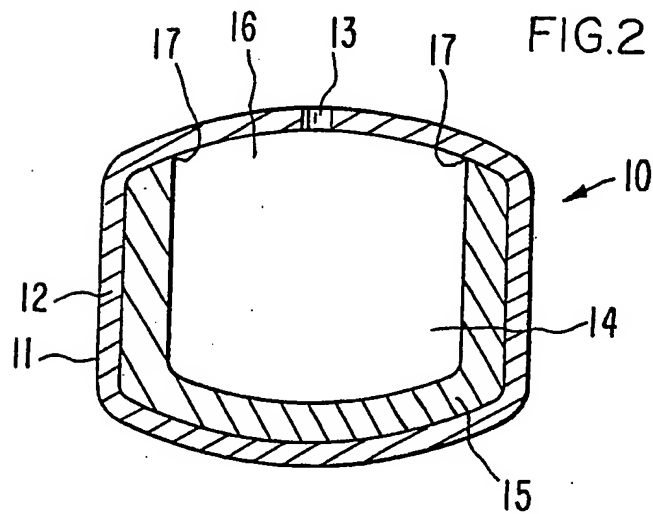
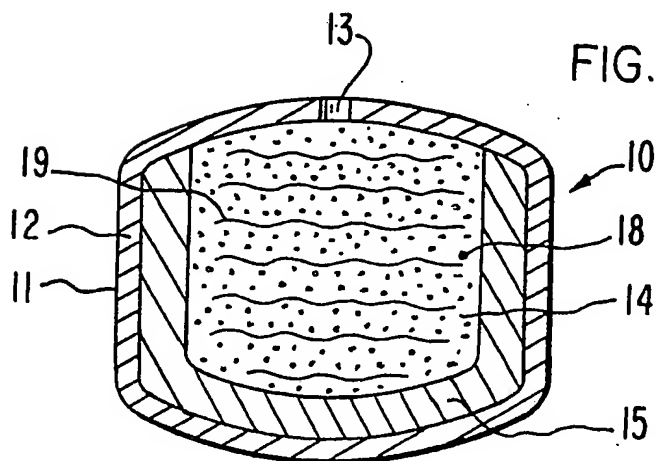


FIG. 3









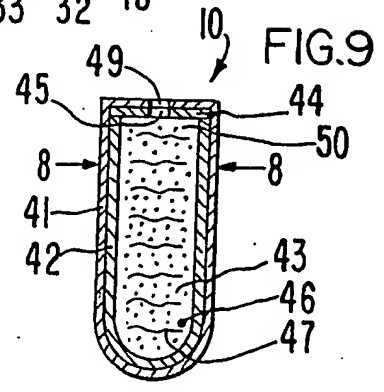


FIG.10

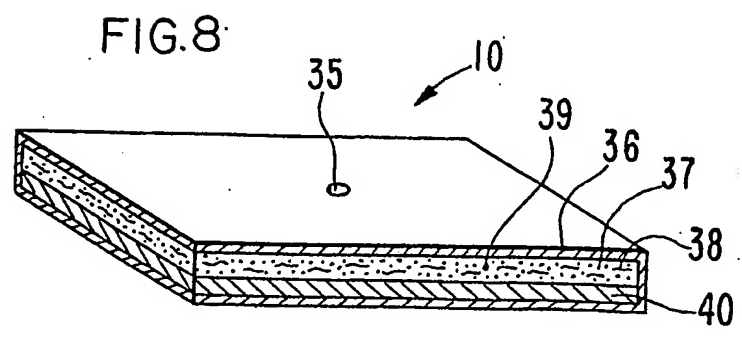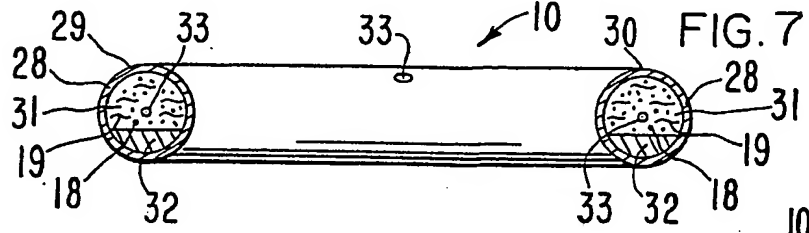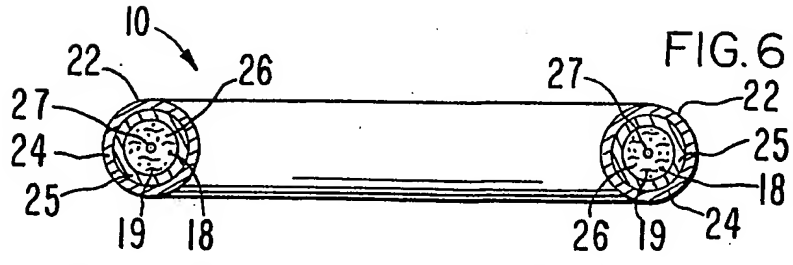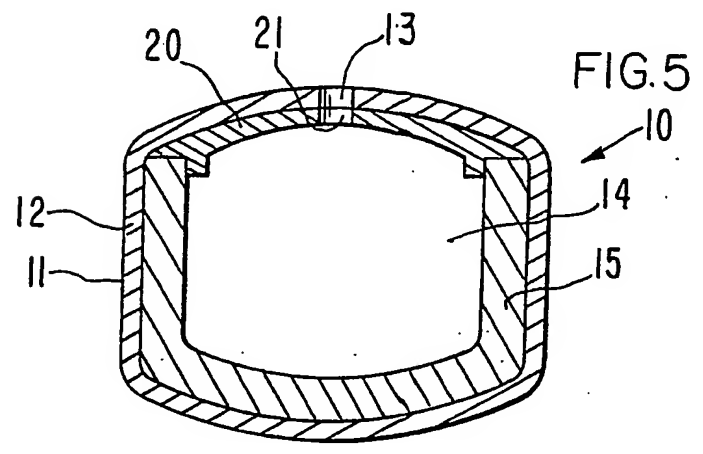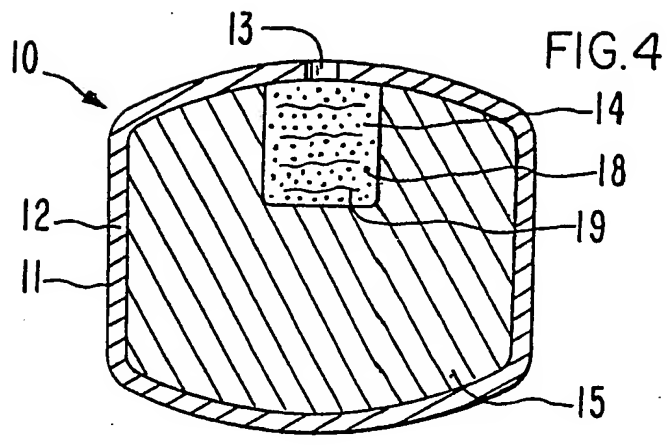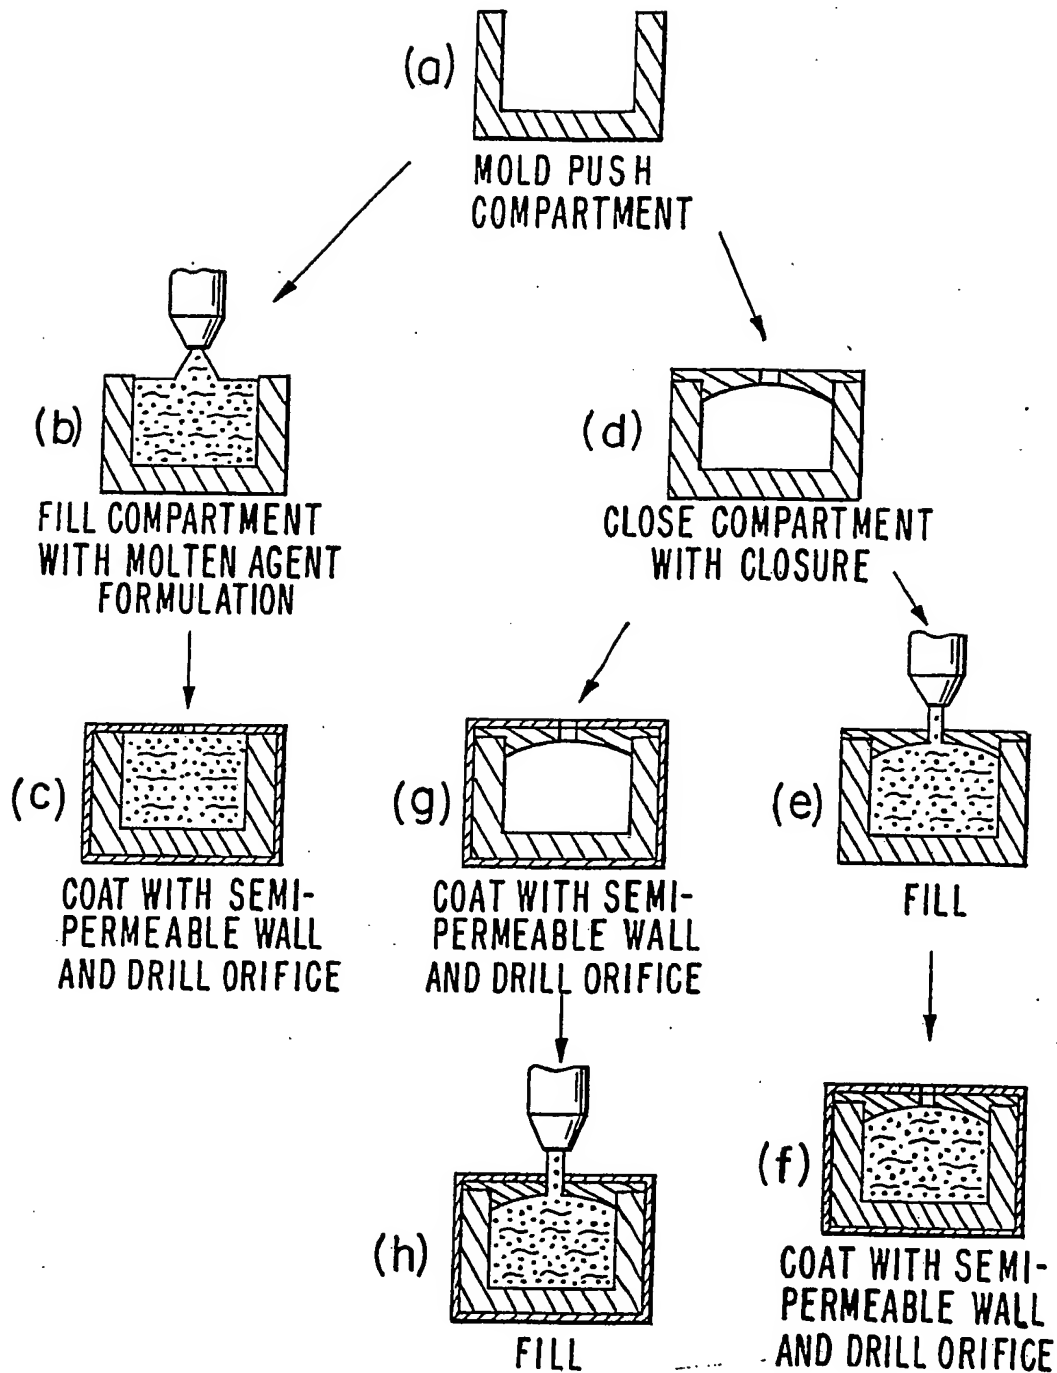

T/4

FIG.11

PUSH-MELT OSMOTIC PUMP
DELIVERING WITEPSOL H-15

N=2

AVERAGE \pm STD. DEV.

$W_f = 2.88 \pm 0.04g$

● POSITION-VERTICAL

■ POSITION-HORIZONTAL


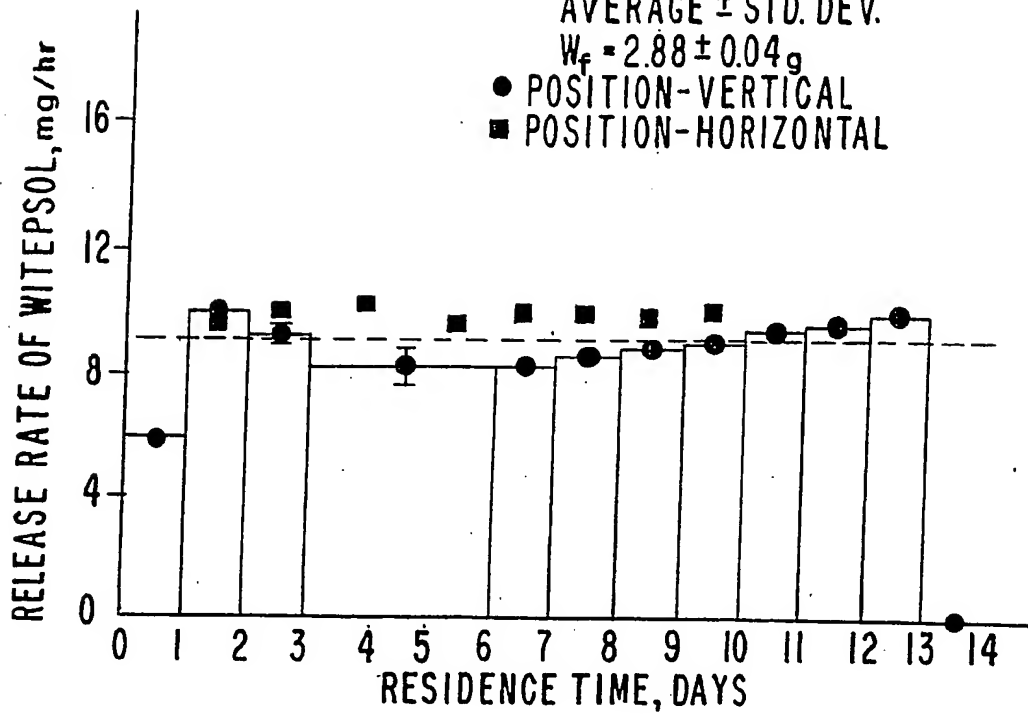


FIG.12

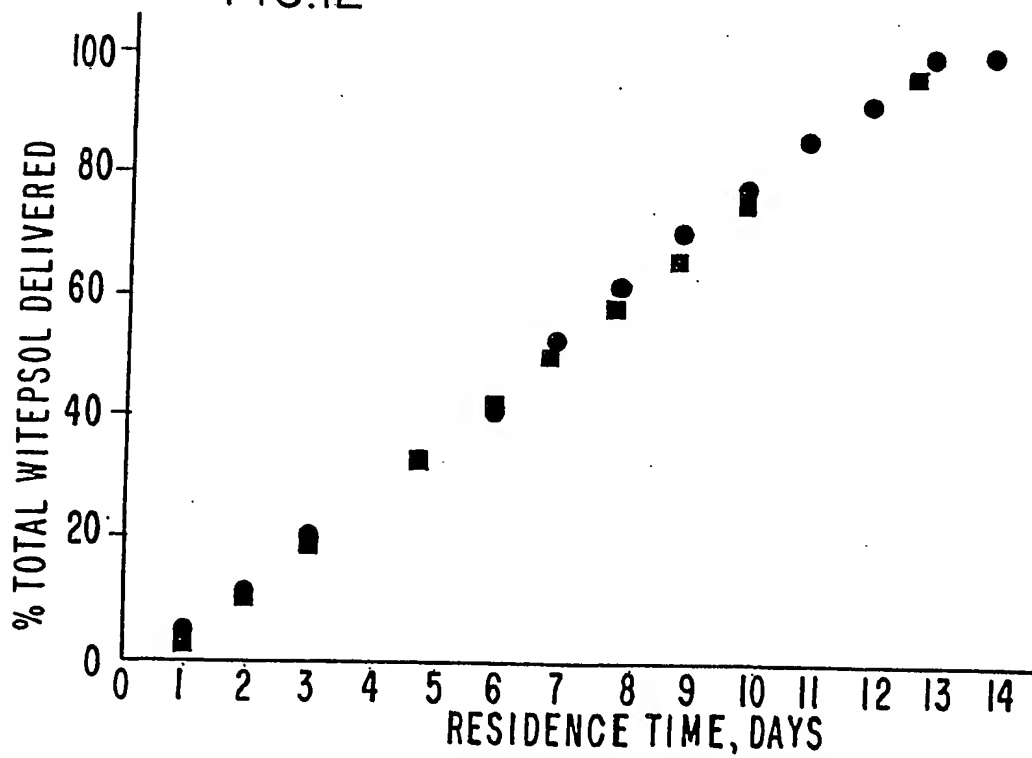

SPECIFICATION

Dispenser for delivering thermo-responsive composition

5 This invention pertains to both a novel and useful dispenser. More particularly, the invention relates to an osmotic dispenser for delivering a thermo-responsive composition containing a beneficial agent at a controlled rate to an environment of use over time. 5

Dispensers for delivering a beneficial agent to an environment of use are known to the dispensing art. For example, United States Pat. No. 3,760,984 issued to patentee Theeuwes discloses a dispenser consisting of a 10 heat shrinkable container carrying on its outer surface an osmotic solute and a distant layer of a polymer permeable to fluid. The dispenser has a plug for filling the container. The dispenser is powered by fluid being imbibed into the dispenser, wherein it dissolves the solute, thereby forming a solution that exerts pressure against the shrinkable container, causing it to shrink and deliver agent from the dispenser. In United States Pat. No. 3,865,108 patentee Hartop discloses a dispenser consisting of an inner collapsible tube containing a 15 medicament disposed in a base member formed of a swellable material. The dispenser delivers the medicament by the base and parts absorbing fluid from the environment, thereby expanding and squeezing the collapsible tube causing the medicine to be expelled from the tube. In United States Pat. No. 3,971,376 patentee Wichterle discloses a dispenser consisting of a capsule having unitary walls formed of a cross-linked gel that is swellable in fluids. A textile fabric is imbedded in the material for imparting strength and 20 minimizing problems due to poor mechanical properties associated with the material that show themselves during fluid uptake used to power the dispenser. In United States Pat. No. 3,987,790, patentees Eckenhoff et al disclose an improvement in an osmotic dispenser consisting of a conduit for filling a bag in the dispenser. The dispenser is powered by an osmotically effective solute imbibing fluid into the dispenser, which imbibed fluid generates hydraulic pressure that is applied against the bag, causing it to squeeze inwardly forcing agent 25 from the dispenser. In United States Pat. No. 3,995,631, patentees Higuchi et al disclose a bag bearing on its outer surface a layer of an osmotic solute, and a distant wall formed of a material having part controlled permeability to fluid. In operation, a solution is formed of the solute, which solution squeezes the bag thereby causing delivery of the agent from the bag. In United States Pat. No. 4,320,758 patentees Eckenhoff et al disclose a dispenser consisting of a flexible bag, a sleeve made of a dispersion of an osmotically effective 30 solute in a soluble polymer, and an outer wall permeable to fluid. The dispenser delivers drug by the sleeve imbibing water into the space between the outer wall and the bag, thereby exerting hydraulic pressure on the bag, which pressure causes the bag to be squeezed and delivers drug from the bag. 30

While the above dispensers are useful for delivering numerous agents to the environment of use, and while the dispensers represent a commercial advancement in the dispensing art, it will be appreciated by those 35 skilled in the art that there are instances where a dispenser made with an inventively novel improvement would also enjoy wide commercial use and application in the dispensing art. For example, if a dispenser is made without a flexible bag and without a fabric member, thereby providing an improvement in the dispenser by reducing the number of steps and parts needed to make the dispenser, such a dispenser would have immediate acceptance, and it would also represent a major advancement in the art. Likewise, if a 40 dispenser is provided that overcomes the prior art dispenser limitation of delivering agents only in solution or suspension forms, by the dispenser now delivering agents that are soluble or insoluble in fluid, semisolid or the like forms, such a dispenser would enjoy instant appreciation and also represent a valuable contribution in the fields of science, medicine and commerce. 40

45 *Objects of the invention*

Accordingly, it is an immediate object of this invention to provide a dispenser for delivering beneficial agents in all forms to environments of use, with a novel dispenser that represents an improvement in the dispenser art. 45

Another object of the invention is to provide a dispenser that is self-contained, self-starting, and 50 self-powered in fluid environments, is easy to manufacture, and can be used for dispensing beneficial agents to animals, including humans, and to other biological and non-biological environments of use. 50

Another object of the invention is to provide a dispenser that can house a thermo-responsive, hydrophobic composition comprising insoluble to soluble drugs, and which thermo-responsive composition in response to the temperature of a biological environment changes its form and becomes fluid, semisolid, or the like for 55 enhanced delivery from the dispenser. 55

Yet another object of the invention is to provide a dispenser comprising a lumen containing a temperature-sensitive composition, an expandable member partially surrounding the composition, an outer semipermeable wall surrounding the member and the lumen, and a dispensing passageway, and which 60 dispenser delivers the composition by the combined physical-chemical operations of the composition melting and becoming fluid to semisolid or the like, the composition maintaining an immiscible boundary at the expanding member interface, and the expanding member swelling to displace an equivalent amount of composition from the dispenser. 60

Yet another object of the invention is to provide a dispenser that is empty until filled with a solid composition that liquifies at elevated temperatures, and when filled can administer the composition that 65 liquifies as a complete pharmaceutical dosage regimen for a period of time, the use of which requires 65

intervention only for the initiation and the termination of the regime.

Yet another object of the invention is to provide a dispenser that can deliver beneficial drugs contained in a thermo-responsive, lipophilic pharmaceutically acceptable carrier that melts in the presence of thermal energy into a dispensable composition that is innocuous thereby substantially avoiding mammalian tissue irritation and interaction with mammalian protein tissue.

Still another object of the invention is to provide an osmotic dispenser containing an eutectic composition formed of at least two components and at least one drug, which eutectic composition has a melting point approximately the same as the temperature of a warm blooded animal, and is dispensed from the dispenser to the animal at said temperature.

Yet another object of the invention is to provide a dispenser that can house a thermo-responsive hydrophilic composition comprising insoluble to soluble drugs, and which thermo-responsive composition in response to energy input accompanying a biological environment of use changes its form and becomes dispensable for operative delivery from the dispenser.

Yet another object of the invention is to provide a dispenser that includes a beneficial agent that is chemically unstable in an aqueous environment and can be housed in the dispenser in a nonaqueous dispensing carrier, which agent is shielded in the nonaqueous carrier during delivery from the dispenser.

Other objects, features and advantages of the invention will be more apparent to those skilled in the dispensing art from the following detailed description of the specification, taken in conjunction with the drawings and the accompanying claims.

Brief description of the drawings

In the drawings, which are not drawn to scale, but are set forth to illustrate various embodiments of the invention, the drawing figures are as follows:

Figure 1 is a view of a dispenser designed and manufactured for orally administering a beneficial drug to a warm-blooded animal;

Figure 2 is an opened view of the dispenser of *Figure 1* through 2-2 of *Figure 1* for illustrating the internal compartment and the thermodynamic members forming the device manufacture as an integral dispenser;

Figure 3 is an opened view of the dispenser of *Figure 1* depicting the compartment of the dispenser charged with a temperature-sensitive composition containing a beneficial agent;

Figure 4 is a view of the opened dispenser of *Figure 3* illustrating the expansion of a driving member used for delivering a beneficial agent from the dispenser;

Figure 5 is an opened view of *Figure 1* depicting a closure member in the lumen of the dispenser;

Figure 6 depicts an embodiment of the invention wherein the members forming the dispenser are in concentric arrangement;

Figure 7 depicts an embodiment of the invention wherein the members forming the dispenser are in partial circular sector arrangement;

Figure 8 depicts an embodiment of the invention wherein the members forming the dispenser are in parallel arrangement;

Figure 9 depicts an embodiment of the invention wherein the members forming the dispenser are in a pocket arrangement;

Figure 10 is a flow diagram of three manufacturing processes used to make the dispenser provided by the invention;

Figure 11 is a graph that illustrates the rate of release per hour from a dispenser; and,

Figure 12 is a graph that illustrates the total amount of heat-sensitive composition delivered from the dispenser.

In the drawings and the specification, like parts in related Figures are identified by like numbers. The terms appearing earlier in the specification, and in the description of the drawings, as well as embodiments thereof, are further described elsewhere in the disclosure.

Detailed description of the drawings

Turning now to the drawings in detail, which are examples of new and useful dispensers for dispensing a beneficial agent, and which examples are not to be construed as limiting, one example of a dispenser is depicted in *Figure 1* by the numeral 10. In *Figure 1*, dispenser 10 is seen comprising a body member 11, having a wall 12 and a passageway 13 in wall 12 that connects the exterior with the interior, as seen in *Figure 2*, of dispenser 10.

Figure 2 is a cross-sectional view of *Figure 1* depicting dispenser 10 comprising body 11, wall 12 that surrounds an internal compartment 14 and a passageway 13 in wall 12 that communicates compartment 14 with the exterior of dispenser 10. Wall 12 is formed of a semipermeable polymeric wall forming composition that is substantially permeable to the passage of external fluid, and it is substantially impermeable to the passage of a beneficial agent and other ingredients contained in compartment 14. Wall 12 is non-toxic and it maintains its physical and chemical integrity during the life of dispenser 10.

Compartment 14 houses also a layer 15 of an expandable driving member that is in contact with the inside surface of wall 12. Interior layer 15 partially surrounds compartment 14, except for a mouth area 16 defined by spaced apart ends 17 of layer 15. Interior layer 15 has a shape that corresponds to the shape of semipermeable wall 12 and compartment 14. Layer 15 is made from a hydrogel composition, noncross-linked or optionally

cross-linked, and it possesses osmotic properties, such as the ability to imbibe an exterior fluid through semipermeable wall 12 and exhibit an osmotic pressure gradient across semipermeable wall 12 against a fluid outside dispenser 10.

Figure 3 depicts dispenser 10 of Figure 1, is illustrated in opened cross-section. In Figure 3, dispenser 10 embraces the structural members described for Figures 1 and 2, and it further illustrates dispenser 10 containing in compartment 14 a beneficial agent 18, identified by dots, and a thermo-responsive, heat-sensitive composition 19, identified by wavy lines. Composition 19 is a delivery means and a transporting carrier for beneficial agent 18. The beneficial agent 18 housed in compartment 14 that can be delivered by dispenser 10 includes agents that are from insoluble to very soluble in both aqueous fluids and in lipophilic medium. The thermo-responsive composition 19, containing agent 18 homogeneously or heterogeneously dispersed or dissolved therein, if formed in a presently preferred embodiment of an anhydrous, heat sensitive, hydrophilic or hydrophobic material that exhibits solid-like properties at room temperature of 21°C, and within a few centigrade degrees thereof, and exhibits a melting point that approximates mammalian body temperature of 37°C, and with a few centigrade degrees thereof. The present invention uses the phrases "melting point", "softening point", or "liquifies" to indicate the temperature at which the thermo-responsive composition melts, undergoes dissolution, or dissolves to form a dispensable carrier so it can be used for dispensing agent 18 from dispenser 10.

In operation, when in the environment of use having a temperature of 37°C within a few degrees, dispenser 10 delivers agent 18 by a combination of thermodynamic and kinetic activities. That is, in operation heat-sensitive composition 19 melts and forms a fluidic, a semi-solid, or a like deliverable phase, for delivering agent 18 through passageway 13. As composition 18 melts, fluid is imbibed through semipermeable wall 12 by hydrophilic layer 15 in a tendency towards osmotic equilibrium, to continuously swell, or expand and increase the volume of layer 15 and simultaneously layer 15 expands in compartment 14 while maintaining an intact immiscible boundary at the interface. Concomitantly, as layer 15 increases its volume, it applies pressure against composition 19 urging composition to decrease its volume. The simultaneous occurrences of the expansion of layer 15, the contraction of compartment 14, and the melting of composition 19 causes composition 19 containing agent 18 to be delivered through passageway 13 to the exterior of dispenser 10. Figures 3 and 4 considered together illustrate dispenser 10 in operation delivering agent 18. Figure 3 depicts dispenser 10 at the beginning of an agent delivery period, and Figure 4 depicts dispenser 10 nearing the end of an agent delivery period. The melting of composition 19, and the immiscibility of composition 19 add the expansion layer 15, the swelling and expansion of layer 15, with its accompanying increase in volume as seen in Figure 4, along with the simultaneous corresponding reduction in volume of compartment 14 as seen in Figure 4, assures the delivery of agent 18 at a controlled rate and continuously over time.

Figure 5 is an embodiment of dispenser 10 of Figures 1 through 4, and it depicts additionally a closure 20 that fits into the open end of compartment 14. Closure 20 is sized and adapted to fit snugly into compartment 14 and it contacts the interior surface of layer 15. The exterior of closure 20 forms a fluid tight seal with the portion of the interior surface of layer 15 with which it contacts. Closure 20, optionally called a plug, has an axial, central bore 21 extending completely through closure 20. Bore 21 provides access to the interior of dispenser 10, mainly compartment 14, for filling compartment 14 with composition 19 containing beneficial agent 18. Concomitantly bore 21 provides access to passageway 13 in semipermeable wall 12 for dispensing composition 19 containing agent 18 from dispenser 10.

Figures 6 and 7 depict additional embodiments of dispenser 10 provided by the invention. In Figures 6 and 7, dispenser 10 is made in a presently preferred process of manufacture by coextruding the structural members forming dispenser 10. In Figure 6, dispenser 10 is illustrated with its ends 22 and 23 opened for depicting the structure of dispenser 10. Dispenser 10 consists essentially of a semipermeable wall 24 that surrounds the complete exterior of dispenser 10, before its ends 22 and 23 are opened for illustrating the structure of dispenser 10, a middle swellable expandable push zone 25, and an inner thermo-responsive agent reservoir zone 26. Dispenser 10 further consists of a pair of delivery orifices 27 positioned in closed, surrounding semipermeable wall 24 for delivering a beneficial agent formulation from agent delivery closed ends 22 and 23, not seen in Figure 6. Figure 7 depicts dispenser 10 comprising a semipermeable wall 28 that surrounds and defines the exterior of dispenser 10, and is cross-sectioned at its ends 29 and 30 for depicting internal thermo-responsive agent reservoir 31 and contacting layer of a swellable, expandable push member 32. Dispenser 10 has three delivery portals 33 through semipermeable wall 28 that communicate with agent reservoir 31 for dispensing the beneficial agent from dispenser 10. One portal is positioned in the body of dispenser 10 and the other two are positioned in the closed ends of dispenser 10. Dispenser 10 of Figures 6 and 7 operate as described above in the environment of use.

Figure 8 depicts dispenser 10 manufactured in a rectangular shape; however, it is to be understood dispenser 10 can have other shapes that are sized and adapted for use in preselected fluid environments. In Figure 8, dispenser 10 is opened along two of its boundaries, 9-9, for illustrating the internal arrangement of dispenser 10. Dispenser 10 comprises a delivery orifice 35, a semipermeable wall 36, a compartment 37 containing a thermo-responsive composition 38 containing beneficial agent 39, and a swellable, expandable push composition 40. Dispenser 10 operated for delivering agent 39 as described above, that is, thermo-responsive composition 38 melts in a temperature range of 35 to 41°C, and composition 40 in laminar arrangement expands and pushes composition 39 through orifice 35.

Figure 9 illustrates a dispenser 10 that is capable of being manufactured in various sizes for uses as a dispensing pump. In the embodiment depicted, dispenser 10 is miniaturized for use as an implant dispenser for administering a beneficial agent to an animal. Dispenser 10 is seen in opened view along 8-8, and it comprises a shape-retaining wall 41 formed in at least a part of a semipermeable material that surrounds an inner, swellable pocket member 42. Pocket 42 is an opened container having an internal space 43 and an opening 50 that is suitably closed by closure 44. Closure 44 has an inlet-outlet, filling-dispensing hole 45 therethrough. Pocket 42 contains a beneficial agent 44 and a thermoresponsive carrier composition 47 therefor. A passageway 49 in semipermeable wall 41 aligns with hole 45 for filling dispenser 10 and for dispensing beneficial agent 46 from dispenser 10.

While Figures 1 through 9 illustrate various dispensers that can be made according to the invention, it is to be understood those dispensers are not to be construed as limiting the invention, as the dispenser can take a wide variety of shapes, sizes and forms for delivering beneficial agents to the environment of use. For example, the dispenser can be made for oral use having various conventional shapes and sizes such as round with a diameter of 3/16 inches to 1 inch. The dispenser can be adapted for use as a buccal, implant, artificial gland, cervical, intrauterine, ear, nose, dermal, vaginal, ano-rectal, rumen, such as the reticulum of cattle, and subcutaneous dispenser. The dispenser also can be shaped, sized and structured and adapted for delivering an active agent in streams, aquariums, fields, factories, reservoirs, laboratory facilities, hot houses, transportation means, hospitals, naval and military means, veterinary clinics, nursing homes, farms, zoos, sickrooms, chemical reactors, and other environments of use.

Detailed description of the invention

In accordance with the practice of this invention, it has now been surprisingly found that dispenser 10 can be provided with a wall comprising a semipermeable material that does not adversely affect a host or animal, is permeable to the passage of an external aqueous type fluid, such as water and biological fluids, while remaining essentially impermeable to the passage of agents, including drugs, osmagents, and maintains its integrity in the presence of a thermotropic composition. The selectively, semi-permeable materials forming the outer wall are substantially insoluble in fluids, they are nontoxic, and they are non-erodible.

Representative materials for forming the semipermeable wall include semipermeable homopolymers, semipermeable copolymers, and the like. In one embodiment typical materials include cellulose esters, cellulose monoesters, cellulose diesters, cellulose triesters, cellulose ethers, and cellulose ester-ethers. These cellulose polymers have a degree of substitution, D.S., on their anhydroglucose unit from greater than 0 up to 3 inclusive. By degree of substitution is meant the average number of hydroxyl groups originally present on the anhydroglucose unit that are replaced by a substituting group, or converted into another group. The anhydroglucose unit can be partially or completely substituted with groups such as acyl, alkanoyl, aryl, alkyl, alkenyl, alkoxy, halogen, carboalkyl, alkylcarbamate, alkylcarbonate, alkylsulfonate, alkylsulfamate, and like semipermeable polymer forming groups.

The semipermeable materials typically include a member selected from the group consisting of cellulose acylate, cellulose diacylate, cellulose triacylate, cellulose acetate, cellulose acetate, cellulose diacetate, cellulose triacetate, mono-, di- and tricellulose alkanylates, mono-, di- and trialkenylates, mono-, di- and tri-arylates, and the like. Exemplary polymers including cellulose acetate having a D.S. of 1.8 to 2.3 and an acetyl content of 32 to 39.9%; cellulose diacetate having a D.S. of 1 to 2 and an acetyl content of 21 to 35%; cellulose triacetate having a D.S. of 2 to 3 and an acetyl content of 34 to 44.8%; and the like. More specific cellulosic polymers include cellulose propionate having a D.S. of 1.8 and a propionyl content of 38.5%; cellulose acetate propionate having an acetyl content of 1.5 to 7% and an acetyl content of 39 to 42%; cellulose acetate propionate having an acetyl content of 2.5 to 3%, an average propionyl content of 39.2 to 45% and a hydroxyl content of 2.8 to 5.4%; cellulose acetate butyrate having a D.S. of 1.8, an acetyl content of 13 to 15%, and a butyryl content of 34 to 39%; cellulose acetate butyrate having an acetyl content of 2 to 29.5%, a butyryl content of 17 to 53%, and a hydroxyl content of 0.5 to 4.7%; cellulose triacylates having a D.S. of 2.9 to 3 such as cellulose trivalerate, cellulose trilaureate, cellulose tripalmitate, cellulose trioctanoate, and cellulose tripropionate; cellulose diesters having a D.S. of 2.2 to 2.6 such as cellulose disuccinate, cellulose dipalmitate, cellulose dioctanoate, cellulose dicarpylate and the like; mixed cellulose esters such as cellulose acetate valerate, cellulose acetate succinate, cellulose propionate succinate cellulose acetate octanoate, cellulose valerate palmitate, cellulose acetate heptonate, and the like. Semipermeable polymers are known in United States Patent No. 4,077,407, and they can be made by procedures described in *Encyclopedia of Polymer Science and Technology*, Vol. 3, pages 325 to 354, 1964, published by Interscience Publishers, Inc., New York.

Additional semipermeable polymers include acetaldehyde dimethyl acetate; cellulose acetate ethylcarbamate; cellulose acetate methylcarbamate; cellulose dimethylaminoacetate; semipermeable polyamides; semipermeable polyurethanes; semipermeable polysulfanes; semipermeable sulfonated polystyrenes, cross-linked, selectively semipermeable polymers formed by the coprecipitation of a polyanion and a poly-cation as disclosed in United States Patent Nos. 3,173,876; 3,276,586; 3,541,005; 3,541,006; and 3,546,142; selectively semipermeable silicon rubbers; semipermeable polymers as disclosed by Loeb and Sourirajan in United States Patent No. 3,133,132; semipermeable polystyrene derivatives; semipermeable (polysodium styrenesulfonate); semipermeable poly (vinylbenzyltrimethyl) ammonium chloride; semipermeable polymers exhibiting a fluid permeability of 10^{-1} to 10^{-7} (cc.mil/cm².hr.atm)

expressed as per atmosphere of hydrostatic or osmotic pressure difference across a semipermeable wall. The polymers are known to the art in United States Patent Nos. 3,845,770; 3,916,899; and 4,160,020, and in *Handbook of Common Polymers*, by Scott, J.R. and Roff, W.J., 1971, published by CRC Press, Cleveland, Ohio.

5 The materials used for forming the swellable, expandable inner wall and the pocket, are polymeric materials neat, and polymeric materials blended with osmotic agents that interact with water or a biological fluid, absorb the fluid and swell or expand to an equilibrium state. The polymer exhibits the ability to retain a significant fraction of imbibed fluid in the polymer molecular structure. The polymers in a preferred embodiment are gel polymers that can swell or expand to a very high degree, usually exhibiting a 2 to 50 fold volume increase. The swellable, hydrophilic polymers, also known as osmopolymers can be noncross-linked or lightly cross-linked. The cross-links can be covalent or ionic bonds with the polymer possessing the ability to swell in the presence of fluid, and when cross-linked it will not dissolve in the fluid. The polymer can be of plant, animal or synthetic origin. Polymeric materials useful for the present purpose include poly(hydroxyalkyl methacrylate) having a molecular weight of from 5,000 to 5,000,000; 10 poly(vinylpyrrolidone) having a molecular weight of from 10, 000 to 360,000; anionic and cationic hydrogels; poly(electrolyte) complexes; poly(vinyl alcohol) having a low acetate residual; a swellable mixture of agar and carboxymethyl cellulose; a swellable composition comprising methyl cellulose mixed with a sparingly cross-linked agar; a water-swellable copolymer produced by a dispersion of finely divided copolymer of maleic anhydride with styrene, ethylene, propylene, or isobutylene; water swellable polymer of N-vinyl lactams; and the like. 15

Other gelable, fluid imbibing and retaining polymers useful for forming the hydrophilic, expandable push member include pectin having a molecular weight ranging from 30,000 to 300,000; gelatin having a viscosity of 15 to 30 millipoises and a bloom strength up to 150 grams; gelatin having a bloom value of 160 to 250; polysaccharides such as agar, acacia, karaya, tragacanth, algin and guar; Carbopol® acidic carboxy polymer and its salt derivatives; polyacrylamides; water-swellable indene maleic anhydride polymers; Good-rite® polyacrylic acid having a molecular weight of 80,000 to 200,000; Polyox® polyethylene oxide polymers having a molecular weight of 100,000 to 5,000,000; starch graft copolymers; Aqua-Keep® acrylate polymers with water absorbability of about 400 times its original weight; diesters of polyglucan; a mixture of cross-linked polyvinyl alcohol and poly-(N-vinyl-2-pyrrolidone); zein available as prolamine; poly(ethylene glycol) having a molecular weight of 4,000 to 100,000; and the like. In a preferred embodiment, the expandable wall is formed from polymers and polymeric compositions that are thermoformable. Representative polymers possessing hydrophilic properties are known in United States Pat. Nos. 3,865,108; 4,002,173; 4,207,893; and 4,327,725; and in *Handbook of Common Polymers*; by Scott and Roff, published by Cleveland Rubber Company, Cleveland, Ohio. 20

35 The osmotically effective compound that can be blended homogeneously or heterogeneously with the swellable polymer, to form a push wall member, are the osmotically effective solutes that are soluble in fluid imbibed into the swellable polymer, and exhibit an osmotic pressure gradient across the semipermeable wall against an exterior fluid. Osmotically effective compounds are known also as osmagents. Osmotically effective osmagents useful for the present purpose include magnesium sulfate, magnesium chloride, sodium chloride, lithium chloride, potassium sulfate, sodium sulfate, mannitol, urea, sorbitol, inositol, sucrose, glucose, and the like. The osmotic pressure in atmospheres, ATM, of the osmagents suitable for the invention will be greater than zero ATM, generally from zero ATM up to 500 ATM, or higher. 40

The swellable, expandable polymer, in addition to providing a driving source for delivering a beneficial agent from the dispenser, further serves to function as a supporting matrix for an osmotically effective solute. 45 The osmotic solute can be homogeneously or heterogeneously blended with the polymer to yield the desired expandable wall or expandable pocket. The composition in a presently preferred embodiment comprises at least one polymer and at least one osmotic solute. Generally, a composition will comprise about 20% to 90% by weight of polymer and 80% to 10% by weight of osmotic solute, with a presently preferred composition comprising 35% to 75% by weight of polymer and 65% to 25% by weight of osmotic solute.

50 The term beneficial agent as used herein means any composition, formulation or compound that can be dispensed to produce a pre-determined beneficial and useful result. The beneficial agents include algicides, antioxidants, air purifiers, biocides, catalysts, chemical reactants, cosmetics, drugs, disinfectants, fungicides, foods, fertility inhibitors, fertility promoters, food supplements, fermentation agents, germicides, insecticides, microorganism attenuators, nutrients, plant growth promoters, plant growth inhibitors, 55 preservatives, surfactants, sterilization agents, sex sterilants, vitamins, and other compositions that benefit the environment, surrounds, habitats and animals. The agent can be insoluble to very soluble in the temperature sensitive material housed in the dispenser.

In the specification and the accompanying claims, the term drug includes any physiologically or pharmacologically active substance that produces a local or systemic effect in animals, including warm blooded mammals, humans and primates, avians, pisces, household, sport and farm animals, laboratory animals, and zoo animals. The term physiological as used herein denotes the administration of a drug to produce normal levels and functions. The term pharmacological denotes variations in response to amounts of drug administered to the host. *Stedman's Medical Dictionary*, 1966, published by Williams and Wilkins, Baltimore, MD. The active drug that can be delivered includes inorganic and organic drugs, without limitations, those drugs that act on 65 the nervous system, depressants, hypnotics, sedatives, psychic energizers, tranquilizers, anticonvulsants,

muscle relaxants, antiparkinson agents, analgesics, anti-inflammatory, anti-malarials, hormonal agents, contraceptives, sympathomimetics, diuretics, anti-parasitics, neoplastics, hypoglycemics, ophthalmics, electro-lytes, diagnostics, and cardiovascular drugs. The amount of agent present in the dispenser can be from 0.05 ng to 20 g or more. For medical applications, the dispenser can contain various

5 amounts, for example 25 ng, 1 mg, 125 mg, 250 mg, 500 mg, 750 mg, 1.5 g and the like. The dispenser can be used once, twice, or thrice daily; the dispenser can be used twice a week, and the like. 5

The term thermo-responsive as used for the purpose of this invention includes thermoplastic compositions capable of softening, or becoming dispensable in response to heat and hardening again when cooled. The term also includes thermotropic compositions capable of undergoing change in response to the application 10 of energy in a gradient manner. These are temperature sensitive in their response to the application or withdrawal of energy. The term thermo-responsive as used for the purpose of this invention in a preferred embodiment denotes the physical-chemical property of a composition agent carrier to exhibit solid, or solid-like properties at temperatures up to 34°C, usually in the range of 20 to 33°C, and become fluid, semisolid, or viscous when disturbed by heat at temperatures from 33°C, usually in the range of 33 to 40°C. The thermo-

15 responsive carrier is heat-sensitive and it has the property of melting, dissolving, undergoing dissolution, softening, or liquefying at the elevated temperatures, thereby making it possible for the dispenser to deliver the thermo-responsive carrier with the beneficial agent homogeneously or heterogeneously blended therein. The thermo-responsive carrier can be lipophilic, hydrophilic or hydrophobic. Another 15

important property of the carrier is its ability to maintain the stability of the agent contained therein during storage and during delivery of the agent. Representative thermo-responsive compositions and their melting 20 points are as follows: cocoa butter 32-34°C; cocoa butter plus 2% beeswax 35-37°C; propylene glycol monostearate and distearate 32-35°C; hydrogenated oils such as hydrogenated vegetable oil 36-37.5°C; 80% hydrogenated vegetable oil and 20% sorbitan monopalmitate 39-39.5°C; 80% hydrogenated vegetable oil and 20% polysorbate 60, 36-37°C; 77.5% hydrogenated vegetable oil 20% sorbitan trioleate and 2.5% beeswax 35-36°C;

25 72.5% hydrogenated vegetable oil, 20% sorbitan trioleate, 2.5% beeswax and 5.0% distilled water, 37-38°C; mono-, di-, and triglycerides of acids having from 8 to 22 carbon atoms including saturated and unsaturated acids such as palmitic, stearic, oleic, linoleic, linolenic and arachidonic; triglycerides of 25

saturated fatty acids with mono- and diglycerides 34-35.5°C; propylene glycol mono- and distearates 33-34°C; partially hydrogenated cottonseed oil 35-39°C; hardened fatty alcohols and fats 33-36°C; hexadienol and hydrous lanolin triethanolamine glyceryl monostearate 38°C; eutectic mixtures of mono-, di-, and triglycerides 30 35-39°C; Witespol® #15, triglyceride of saturated vegetable fatty acids with monoglycerides 33.5-35.5°C; Witespol® H32 free of hydroxyl groups 31-33°C; Witespol® W25 having a saponification value of 225-240 and a melting point of 33.5-35.5°C; Witespol® E75 having a saponification value of 220-230 and a melting point of 37-39°C; a polyalkylene glycol such as polyethylene glycol 1000, a linear polymer of ethylene oxide, 38-41°C;

35 polyethylene glycol 1500, melting at 38-41°C; polyethylene glycol monostearate 39-42.5°C; 33% polyethylene glycol 1500, 47% polyethylene glycol 6000 and 20% distilled water 39-41°C; 30% polyethylene glycol 1500, 40% polyethylene glycol 4000 and 30% polyethylene glycol 400, 33-38°C; mixture of mono-, di-, and triglycerides of saturated fatty acids having 11 to 17 carbon atoms, 33-35°C; and the like. The thermo-responsive composition is a means for storing a beneficial agent in a solid composition at a temperature of 20-33°C, 35

40 maintaining an immiscible boundary at the swelling composition interface, and for dispensing the agent in a flowable composition at a temperature greater usually 33°C usually 33-40°C. The thermoresponsive composition on being dispensed into a biological environment are easily excreted, metabolized, assimilated, or the like for effective use of the beneficial agent. 40

The semipermeable wall can be applied to the expandable wall or pocket, to the laminated thermo-responsive lamina-expandable lamina, by molding, forming, spraying, or dipping into a semipermeable wall 45 forming material. Other and presently preferred techniques that can be used for applying the semipermeable wall are the air suspension procedure and the pan covered procedures. This procedure consists in suspending and tumbling the laminate, or the pocket member in a current of air and a semipermeable wall forming composition until the wall surrounds and coats the member. The procedure is repeated with a different..... 45

50 semipermeable wall forming composition to form a semipermeable laminated wall. The air suspension procedure is described in U.S. Pat. No. 2,799,241; *J. Am. Pharm. Assoc.*, Vol. 48, pages 451 to 459, 1979; and *ibid*, Vol. 49, pages 82 to 84, 1960. Other standard manufacturing procedures are described in *Modern Plastics Encyclopedia*, Vol. 46, pages 62 to 70, 1969; and in *Pharmaceutical Sciences*, by Remington, 14th Edition, pages 1626 to 1678, 1970, published by Mack Publishing Co., Easton, PA. 50

55 Exemplary solvents suitable for manufacturing the semipermeable wall include inert inorganic and organic solvents that do not adversely harm the materials, the expandable wall, the pocket, the thermo-responsive composition and the final dispenser. The solvents broadly include members selected from the group consisting of aqueous solvents, alcohols, ketones, esters, ethers, aliphatic hydrocarbons, halo-genated solvents, cycloaliphatics, aromatics, heterocyclic solvents and mixtures thereof. Typical solvents include acetone, 55

60 diacetone alcohol, methanol, ethanol, isopropyl alcohol, butyl alcohol, methyl acetate, ethyl acetate, isopropyl acetate, n-butyl acetate, methyl isobutyl ketone, methyl propyl ketone, n-hexane, n-heptane, ethylene glycol monoethyl ether, ethylene glycol monoethyl acetate, methylene dichloride, ethylene dichloride, propylene dichloride, carbon tetrachloride, nitro-ethane, nitropropane, tetrachloroethane, ethyl ether, isopropyl ether, cyclohexane, cyclo-octane, benzene, toluene, naphtha, 1,4-dioxane, tetrahydrofuran, diglyme, water, 60

65 and mixtures thereof such as acetone and water, acetone and methanol, acetone and ethyl alcohol, methy- 65

lene dichloride and methanol, and ethylene dichloride and methanol. Generally, for the present purpose the semipermeable wall is applied at a temperature a few degrees less than the melting point of the thermo-responsive composition. Or, the thermoplastic composition can be loaded into the dispenser after applying the semipermeable wall.

5 The expandable wall, the pocket member, or the expandable lamina can be made by conventional thermo- 5
forming polymeric processes, such as spraying a mandrel, dipping a mold into a wall forming composition, blow molding, vacuum forming, compression molding, injection molding, extrusion and lamination. In one presently preferred embodiment, a pocket or expandable molded push compartment is made according to the compression process illustrated in Figure 10. The process of compression molding consists in using a 10
10 mold cavity and a plunger. A mold cavity forms one surface on the molded part and the polymeric wall 10
forming composition is charged into the mold. The mold plunger forms the other surface of the pocket. The plunger compresses the polymeric composition when the mold is closed, and when the mold is closed the polymeric composition is compressed to the shape of the final pocket. The mold cavity and plunger are held in this position until the polymeric composition hardens. In Figure 10, the pocket or molded push compart- 15
15 ment is identified by the letter a, and it is seen on removal from the compression mold. Next, the pocket moves in one embodiment to a filling station, b, where it is positioned under a filling hopper and filled with a molten agent formulation. After cooling, the filled compartment is coated at c with a semipermeable wall and an orifice laser drilled through the semipermeable wall to yield a dispenser. In a similar process, the molded compartment a is closed at d with a closure made with a filling-discharge bore, and the closed compartment 20
20 filled at filling station e at room temperature with a molten agent formulation. Finally, the filled compartment is coated at f with a semipermeable wall and an orifice laser drilled through the semipermeable wall in axial alignment with the bore to yield the dispenser. In a similar process, the closed compartment is coated with a semipermeable membrane (wall) and an orifice laser-drilled through the semipermeable wall in axial alignment with the bore to yield the empty dispenser identified by g. Then the dispenser is filled at room temper- 25
25 ature with the molten agent formulation to yield the final operable dispenser h.

The expression orifice or passageway as used herein comprises means and methods in the semipermeable wall suitable for releasing a beneficial agent formulation from the dispenser. The orifice can be formed by mechanical or laser drilling, or by eroding an erodible element in the wall, such as a gelatin plug. A detailed description of orifices and the preferred maximum and minimum dimensions for an orifice are disclosed in 30
30 United States Pat. No. 3,845,770 and 3,916,899.

Description of examples of the invention

The following examples are merely illustrative of the present invention and they should not be construed as limiting the scope of the invention in any way, as these examples and other equivalents thereof will become 35
35 more apparent to those skilled in the art in the light of the present disclosure, the drawings and the accompanying claims.

Example 1

A dispenser is prepared as follows: first, an expandable capsule-shaped container is formed by injection 40
40 molding a polymeric composition. The container has a diameter of 12 mm and a depth of 40 mm. The wall of the container is formed from a composition comprising 30% by wt of sodium chloride, and 70% by weight of poly(ethylene oxide) having a molecular weight of 3,000,000. The wall forming ingredients are blended in a commercial blender for 20 minutes to yield a homogenous composition. The composition is pressed into tablets and fed into an injection molding machine, and the container formed by injection molding at 145- 45
45 150°C and at 6.5-7.0 × 10 kPa.

Next, the container is filled with a heat-sensitive composition comprising 0.5% by weight of theophylline, 77% by weight of hydrogenated vegetable oil, 20% by weight of sorbitan trioleate and 2.5% by weight of beeswax. The container is filled with the heat-sensitive drug composition at 36-37°C. After cooling to 21°C, an outer semipermeable wall is applied to the filled container by coating in a Wurster air suspension coater. The 50
50 semipermeable wall is formed from a 5% by weight, methylen chloride solution of cellulose acetate butyrate. The semipermeable wall is applied to a thickness of 0.4 mm, and the predispensers dried in an oven at 50°C for 5 to 10 days. Finally, a 0.75 mm orifice is laser drilled through the semipermeable wall for dispensing the drug formulation from the compartment of the dispenser.

Example 2

The container or wide mouth pocket is prepared according to Example 1 are filled with a drug formulation 55
55 comprising 0.20g of paracetamol, 0.02g of codeine phosphate, 0.15g acetylsalicylic acid and 2.0g of Witepsol® h35, a glycerol ester mixture of saturated vegetable fatty acids, in which lauric acid predominates. The composition is prepared by triturating and mixing well all the drug substances, and then adding the 60
60 Witepsol carrier base at 38-40°C. The pockets are filled with the molten composition and on cooling produce a creamy consistency. The pockets are coated with a semipermeable wall and an orifice laser drilled as previously described.

Example 3

A dispenser having a compartment containing a thermo-responsive heat-sensitive composition in laminar arrangement with an expandable composition is made as follows: a mold is successively charged first with a molten composition comprising 2.5% phenol-barbital, 20.5% glycergelatin and 77.0% of theobroma oil, a glyceride of stearic, palmitic and lauric acids, to form on cooling to room temperature the thermo-responsive lamina; then the mold is charged with a mixture of 30 parts of ethyleneglycol monomethacrylate containing 0.12 parts of ethyleneglycol dimethacrylate and 10 parts of 0.13% aqueous solution of sodium disulfate in aqueous ethanols. This mixture polymerizes at 30°C, and after 20 minutes following equilibration to room temperature the solid laminate is removed from the mold.

- 10 Next, a solution of cellulose acetate in acetone, 15 wt%, with an acetyl content of 39.8% is prepared and the laminate coated by dipping into the solution for 15 times, first for a 10 second dip, then for 1 minute per dip, with an intervening 5 minutes drying period. Following the dippings, the dispensers are dried at room temperature of 72°F for 10 days. This procedure applies a 0.7 mm semipermeable rate controlling wall around the laminate. A passageway is laser drilled through the semipermeable wall connecting the exterior of the dispenser with the thermo-responsive lamina.

Example 4

- 20 A dispensing device is prepared as follows: first, a heat-sensitive eutectic mixture of 77% neutral fat having a melting point of 35-37°C and 19.5% paraffin wax having a melting point of 52°C is heated and liquified. To the liquid melt is added 3.5% of acetylsalicylsalicylic acid and the mixture poured into a mold. After cooling and solidification 500 mg of Cyanamer® polyacrylamide, a hydrogel of approximately 200,000 mol.wt. is added to the mold and the layers pressed to form a thermo-responsive layer in contact with a hydrogel layer, and the contacting layer removed from the mold.

- 25 Next, a semipermeable wall is formed by blending 85g of cellulose acetate having an acetyl content of 39.8 with 200 ml of methylene chloride and 200 ml of methanol, and spray coating the two layered compartment forming member in an air suspension machine until a 0.25 mm thick semipermeable wall surrounds the compartment. The devices are dried for two weeks and a 0.4 mm passageway is laser drilled through the semipermeable wall communicating with the heat-sensitive composition.

Example 5

- 30 The procedure of Example 4 is repeated with the compositions as described, except for the thermo-responsive composition, which now comprises a polyoxyethylene ether of a partial ester of a fatty acid and a polyhydroxy cyclic inner ether containing drug. The polyoxyethylene ether has from 2 to 5 oxyethylene groups and the partial esters of fatty acids contain from 14 to 18 carbon atoms. The composition contains a drug, and the thermo-responsive composition melts rapidly and completely at body temperature to form a liquified composition for easy dispensing from the dispenser.

Example 6

- 40 The procedures of Examples 4 and 5 are repeated for formulating a thermo-responsive composition comprising 85 mg of sorbitan monostearate hydroxypolyoxyethylene ether with 4 oxyethylene groups per mol having a melting point of 38°C, 5 mg of sorbitan monostearate hydroxypolyoxyethylene ether with 20 oxyethylene groups per mole, 5 mg of the fatty acid ester sorbitan monoricinoleate and 15 mg of sodium indomethacin.

Example 7

- 45 A heat-sensitive composition for use in the dispenser of Example 1 is prepared by blending with heat 30% polyethylene glycol 1500, 30% polyethylene glycol 4000, 30% polyethylene glycol 400, 9% cocoa butter and 1% oxyprenolol hydrochloride. The composition exhibits a melting time of 15 to 20 minutes at 37°C.

Example 8

An osmotic capsule in the shape of a thin-walled cylinder with a hemispherical bottom was injected, molded with a composition consisting essentially of 65% sodium chloride, 20% Polyox®, a poly-(oxyethylene) polymer having a molecular weight of about 200,000, and 15% polyethylene glycol 200,000. The injection conditions under which the capsule was molded were as follows:

5	nozzle temperature	180 ±20°C	
	zone 1	off	
	zone 2	230 ±25°C	
10	zone 3	220 ±25°C	10
	hot tip temperature	180 ±25°C	
	mold cavity temperature	18 ±3°C	
	core pin temperature	8 ±3°C	
	stopper plate temperature	8 ±3°C	
15	lamp time	13.5±2 sec	15
	injection time	1.9±0.5 sec	
	injection speed	5 ±1	
	injection pressure	84 ±7 kg/cm ²	
	back pressure	42 ±7 kg/cm ²	
20	cycle time	20 sec	20

inside and outside diameter and inside and outside length were 1.17 cm and 1.33 cm, and 3.70 cm and 3.85 cm.

The osmotic capsule was filled with 2.88 g of H-15 Witespol glycerol ester of a saturated vegetable fatty acid containing 0.1% oil red dye. The prefilled osmotic capsules were coated in a pan coater, (Accela-Cota) with cellulose acetate butyrate in a solvent consisting of methylene chloride: ethanol, (95.5), until a semipermeable membrane of 0.5 mm thickness was applied uniformly thereto. The systems were dried at 55°C for 7 days, and an exit port was drilled to 1 mm diameter. The systems were tested for their release rate. In the accompanying Figures, Figure 11 depicts the rate of release of thermosensitive composition in mg/hr/day from the system. Figure 12 depicts the cumulative amount of thermo-sensitive composition released expressed as percent total delivered from the system. The circles indicate release from the system in a vertical position, and the squares indicate release from the system positioned in a horizontal position.

An embodiment of the invention pertains to a method for administering a beneficial drug at a controlled rate to the vaginal passageway or to the ano-rectal passageway of a warm-blooded animal, which method comprises the steps of: (A) admitting into the passageway a dispenser comprising; (1) an inside wall formed of a swellable, expandable polymeric composition that surrounds and forms an internal compartment; (2) a mouth in the inside wall; (3) a beneficial drug formulation in the compartment comprising a dosage unit amount of drug for performing a therapeutic program and a heat-sensitive carrier melts or dissolves at body temperature and is a means for transporting the drug from the dispenser; (4) an outer wall surrounding the pocket and the mouth, the outer wall formed of a semipermeable polymeric composition permeable to fluid and impermeable to drug; and, (5) an orifice through the outer wall and communicating through the mouth with the internal compartment; (B) imbibing fluid through the semipermeable wall by the inside wall at a rate determined by the permeability of the semipermeable wall and the osmotic pressure gradient across the semipermeable wall causing the inside wall to swell and expand; (C) melting the drug formulation in the compartment to form a flowable formulation; and (D) delivering the beneficial drug formulation from the compartment by the inside wall swelling and expanding against the melted formulation causing the formulation to be dispensed in a therapeutically effective amount through the orifice at a controlled rate to the passageway to produce the desired medical effect over a prolonged period of 1 hour to months, preferably 1 hour to 24 hours.

Inasmuch as the foregoing specification comprises preferred embodiments of the invention, it is understood that variations and modifications may be made herein in accordance with the inventive principles disclosed, without departing from the scope of the invention.

CLAIMS

1. A dispenser for delivering at a controlled rate a heat sensitive beneficial agent formulation to an environment of use, the dispenser comprising:
 - a) an inside wall surrounding and forming an internal compartment for containing the beneficial agent formulation with a port in the wall for filling and dispensing agent formulation from the compartment, the wall formed of a composition that is a means for absorbing fluid, swelling and expanding into the compartment;
 - b) an outside wall surrounding the inside wall, the outside wall formed of a composition that is permeable to the passage of fluid and substantially impermeable to the passage of agent; and,
 - c) a passageway in the outside wall communicating with the port for dispensing a beneficial agent formulation from the dispenser.

2. The dispenser for delivering at a controlled rate a heat-sensitive beneficial agent formulation according to claim 1, wherein the compartment contains an agent formulation that is a solid up to 33°C and melts above 33°C.
3. The dispenser for delivering at a controlled rate a heat-sensitive beneficial agent formulation according to claim 1, wherein the inside wall is formed of a composition comprising a hydrogel polymer and an osmotically effective solute. 5
4. The dispenser for delivering at a controlled rate a heat-sensitive beneficial agent formulation according to claim 1, wherein the inside wall is formed of a composition comprising a hydrogel polymer that swells and expands in the presence of fluid.
5. The dispenser for delivering at a controlled rate a heat-sensitive beneficial agent formulation according to claim 1, wherein a closure is in the port in the wall and a bore is in the closure. 10
6. The dispenser for delivering at a controlled rate a heat-sensitive beneficial agent formulation according to claim 1, wherein the outside wall is formed of a member selected from the group consisting of cellulose ester, cellulose diester, cellulose ether, cellulose ester ether, cellulose acylate, cellulose diacylate, cellulose triacylate, cellulose acetate, cellulose diacetate, cellulose triacetate, and cellulose acetate butyrate. 15
7. The dispenser for delivering at a controlled rate a heat-sensitive beneficial agent formulation according to claim 1, wherein the outside wall is formed of a hydrophilic composition that swells and expands in the presence of aqueous fluids imbibed into the dispenser.
8. The dispenser for delivering at a controlled rate a heat-sensitive beneficial agent formulation according to claim 1, wherein the inside wall is formed of polyethylene oxide. 20
9. The dispenser for delivering at a controlled rate a heat-sensitive beneficial agent formulation according to claim 1, wherein the inside wall is formed of polyethylene oxide, polyethylene glycol and an osmotically effective solute.
10. The dispenser for delivering at a controlled rate a heat sensitive beneficial agent formulation according to claim 1, wherein the compartment contains a heat-sensitive composition comprising a glycerol ester of saturated fatty acids. 25
11. A dispenser for delivering a beneficial agent at a controlled rate to a fluid biological environment of use having a temperature greater than 33°C, the dispenser comprising:
 - a) a wall formed of a semipermeable polymeric composition that surrounds and defines:
 - b) a compartment; 30
 - c) a first means in the compartment for changing from a solid composition to a dispensable composition in response to the temperature of the biological environment, said first means containing a beneficial agent and in contacting arrangement with a second means in the compartment for imbibing fluid through the semipermeable wall and for expanding in the compartment; and,
 - d) a passageway in the wall connecting the exterior of the dispenser with the first means. 35
12. The dispenser for delivering a beneficial agent at a controlled rate to a biological environment according to claim 11, wherein said first means is a lamina.
13. The dispenser for delivering a beneficial agent at a controlled rate to a biological environment according to claim 11, wherein said second means is a lamina.
14. The dispenser for delivering a beneficial agent at a controlled rate to a biological environment according to claim 11, wherein said solid composition is a gel. 40
15. The dispenser for delivering a beneficial agent at a controlled rate to a biological environment according to claim 11, wherein said solid composition melts in response to the temperature of the biological environment.
16. The dispenser for delivering a beneficial agent at a controlled rate to a biological environment according to claim 11, wherein said solid composition liquifies in response to the temperature of the biological environment. 45
17. A dispenser for delivering a beneficial agent at a controlled rate to a fluid environment having a temperature corresponding to the temperature of a warm-blooded animal, the dispenser comprising:
 - a) a wall formed of a semipermeable polymer composition that defines a closed tube having an internal lumen: 50
 - b) a first means positioned in the center of the lumen for changing from a nondispensable composition to a dispensable composition in response to the temperature of the environment, said means containing a beneficial agent and surrounded by a second means in the lumen for imbibing fluid through the semipermeable wall and expanding against the first means; and,
 - c) a passageway in the wall communicating with the exterior of the dispenser and the first means. 55
18. The dispenser for delivering a beneficial agent at a controlled rate to a fluid environment according to claim 17, wherein the second means is positioned between the first means and the inside surface of the wall.
19. The dispenser for delivering a beneficial agent at a controlled rate to a fluid environment according to claim 17, wherein the passageway is in the wall at the closed end of the tube. 60
20. The dispenser for delivering a beneficial agent at a controlled rate to a fluid environment according to claim 17, wherein the nondispensable composition is a semisolid.
21. The dispenser for delivering a beneficial agent at a controlled rate to a fluid environment according to claim 17, wherein the nondispensable composition is a solid.
22. The dispenser for delivering a beneficial agent at a controlled rate to a fluid environment according to 65

claim 17, wherein the nondispensable composition does not flow at a temperature less than 33°C.

23. A beneficial agent delivery device, the device comprising:

a) a tubular shaped body closed at its end and formed of a polymeric composition permeable to the passage of an external fluid and substantially impermeable to the passage of a beneficial agent;

5 b) a lumen in the body;

c) a first layer in the lumen, the first layer a composition comprising a beneficial agent and a carrier for the agent;

d) a second layer in the lumen in contacting relation with the first layer, the second layer a hydrogel that expands in the presence of fluid that enters the lumen; and,

10 e) a passage in the body connecting the exterior of the device with the first layer.

24. The beneficial agent delivery device according to claim 23, wherein the carrier is a nontoxic, pharmaceutically acceptable hydrogenated oil.

25. The beneficial agent delivery device according to claim 23, wherein the carrier is a member selected from the group consisting essentially of a nontoxic monoglyceride, diglyceride, and triglyceride.

15 26. The beneficial agent delivery device according to claim 23, wherein the carrier is a nontoxic hydrophilic having a molecular weight greater than 1000.

27. The beneficial agent delivery device according to claim 23, wherein the carrier is a nontoxic eutectic composition comprising a glyceride and hydrogenated oil.

28. The beneficial agent delivery device according to claim 23, wherein the carrier is a nontoxic glyceride of a fatty acid having from 8 to 22 carbon atoms.

29. The beneficial agent delivery device according to claim 23, wherein the carrier is a nontoxic composition comprising a mixture of at least two polyethylene glycols with one of said polyethylene glycol having a molecular weight greater than 1000.

30. A dispenser for delivering at a controlled rate a heat sensitive beneficial agent formulation to an environment of use, the dispenser comprising:

a) an inside wall surrounding and forming an internal compartment for containing the beneficial agent formulation with a port in the wall for filling and dispensing agent formulation from the compartment, the wall formed of a composition that is a means for absorbing fluid, swelling and expanding into the compartment;

30 b) an outside wall surrounding the inside wall, the outside wall formed of a composition that is permeable to the passage of fluid and substantially impermeable to the passage of agent, and is a composition comprising a member selected from the group consisting of polysulfone, polyacrylate, polymethacrylate, polymethylmethacrylate, and polyurethane; and,

35 c) a passageway in the outside wall communicating with the port for dispensing a beneficial agent formulation from the dispenser.

31. A dispenser for delivering a heat sensitive beneficial agent formulation to an environment of use substantially as hereinbefore set forth, and with reference to and/or as illustrated in the accompanying drawings.